



Module M with Base C

LINEAR Module M



LINEAR Module M

Easy installation with little space needed.

Various options with different bases to choose from



Product profile LINEAR Module M

With our new stove LINEAR Module M you can install a powerful fireplace in the blink of an eye. The compact and simple construction in combination with the optional bases offers the right solution for every room situation.

Features

- High tightness, therefore very low emissions
- High efficiency
- Only hinged door with left-side door hinge!
- Good airflow for optimal combustion and clean glass
- Combinable with bases A-C
- External combustion air inlet only on back

Optionally available

- Convection air blower for Linear Cassettes
- Combustion air inlet on the back
- All combustion chamber linings are also available in black

Technical data

Output

Heat output	6,9 kW
Heat output range	4,8 – 9,0 kW (+/-30%)
Amount of wood	~ wood 2,0 kg/h
Efficiency	> 80 %

Dimensions / Weight

Dimensions (W x H x D)	715 x 613 x 450 mm
Flue outlet ø	150 mm
Door height	503 mm
Weight	~ 112 – 144 kg

Certificates / Approvals

min. delivery pressure	12 Pa
CO content in mg/Nm ³	< 1250 mg/Nm ³
Dust content in mg/Nm ³	< 40 mg/Nm ³
Requirements fulfilled	DIN 13240, DIN plus, 15a, 1st and 2nd level of the German Federal Pollution Control Ordinance (BlmSchV). Austria, Switzerland



LINEAR
Module M
incl. Base A
WxHxD
716x690x450 mm



LINEAR
Module M
incl. Base A + B
WxHxD
716x1005x450 mm



LINEAR
Module M
incl. Base A + C
WxHxD
1150x1005x450 mm



LINEAR
Module M
incl. Base B
WxHxD
716x978x450 mm




LINEAR
Module M
incl. Base C
WxHxD
1150x978x450 mm

Front and side view

LINEAR Module M base options

Optional bases A, B and C.

With base C the LINEAR Module M can be moved and variably fixed into place

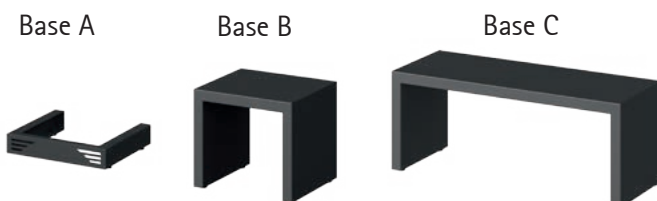

Top view

